



PACOMAT V

NEW

**CHANNEL BALING PRESS
WITH VERTICAL WIRE TYING SYSTEM**


Technical data and measurements

PACOMAT		V-35 C	V-50 C			V-65 C					
pressing force	t (kN)	36 (356)			50 (486)			65 (633)			
spec. pressing force	N/cm ²	48			65			84			
tunnel cross section	cm	75 x 100			75 x 100			75 x 100			
hopper opening	cm	100 x 92			120 x 92			140 x 92			
feeding volume	ca. m ³	0,95			1,05			1,25			
number of wires	pieces	4			4			4			
driving power	kW	11	22	30	22	30	45	22	30	45	75
press output (ideal)	max. m ³ /h	150	360	440	295	365	600	235	305	530	660
press output (under load)	max. m ³ /h	70	140	185	125	170	225	105	150	205	295
press capacity (weight) (in relation to bulk weight)											
• 35 kg/m ³ e.g. flattened OCC	ca. t/h	2,5	4,9	6,5	4,4	6,0	7,9	3,7	5,3	7,2	10,3
• 50 kg/m ³ e.g. shredded paper	ca. t/h	3,4	6,7	8,9	6,0	8,1	10,7	5,0	7,2	9,9	14,1
baler weight (according to equipment)	ca. t	11			12			13			

Dimensions in mm	A	B	C	D	E	G	H	I	K	L	M	N	O	P
PACOMAT V-35 C	7755	1977	4677	1000	3475	3975	3780	2477	330	750	3350	920	810	1000
PACOMAT V-50 C	8177	1970	4697	1200	3475	4075	4102	2497	350	750	3350	920	810	1000
PACOMAT V-65 C	8914	1985	4697	1400	3720	4420	4494	2497	350	750	3350	920	810	1000

Additional FEATURES of the new PACOMAT:

- Wear plates of specialty steel for press chamber bottom increase the lifetime of the press. They are bolted for easy replacement.
- New DENSITRONIC control system for tunnel adjustment provides for better response to various material grades.
- The new Touch Panel TP 177 facilitates the operation of the machine through recipe management and a comprehensive display of data.
- To make maintenance easy, the pressure plate is provided with grouped nipples for lubrication of all rollers.

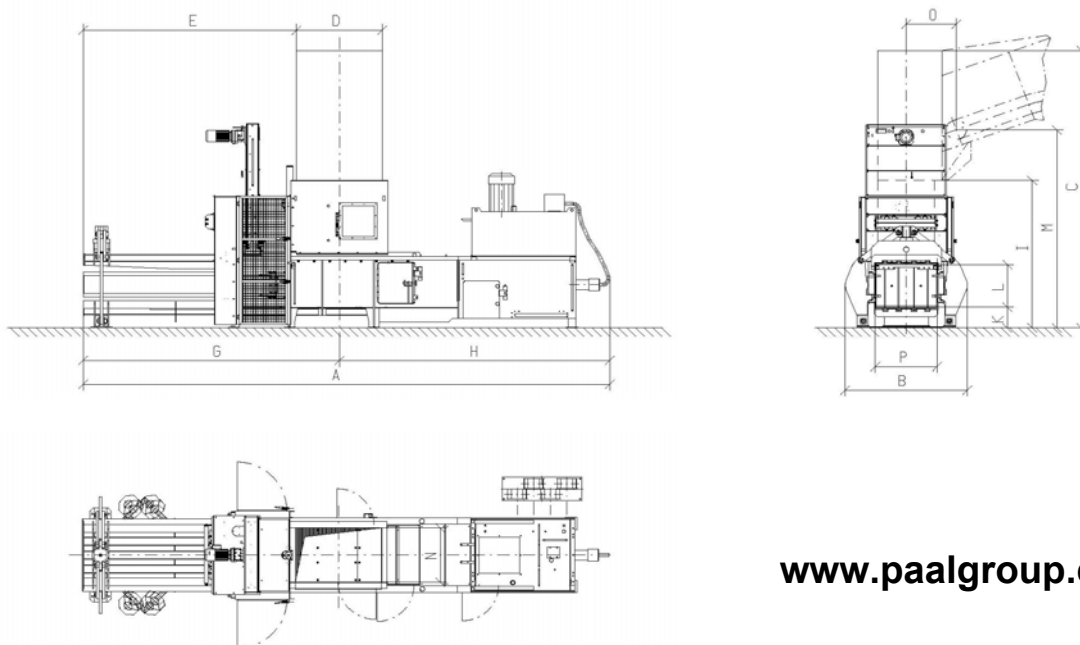

www.paalgroup.com

PAAL®

PAAL GmbH
Raiffeisenstraße 15-17
49124 Georgsmarienhütte
Germany

Tel.: +49 (0) 5401 488 0
Fax.: +49 (0) 5401 488 13
info@paalgroup.com

FAES®

Amadeo Farell S.A.U.
Poligono Industrial Can Carné
Calle Montsià s/n, P.O. Box 125
08211 Castellar del Vallés
Spain

Tel.: +34 937 143 210
Fax.: +34 937 143 169
info@faesnet.net

DICOM

Dicom Ltd.
Lydford Road
Meadow Lane Industrial Estate
Alfreton, Derbyshire DE55 7RQ
Great Britain

Tel.: +44 (0) 177 352 0565
Fax.: +44 (0) 177 352 0881
sales@dicom.ltd.uk

COMDEC

COMDECPAAL
9, rue Gustave Eiffel
21540 Sombornon
France

Tel.: +33 (0) 3 80 33 49 26
Fax.: +33 (0) 3 80 33 42 43
com@comdec-paal.com